




DTP08-250kg-R500-CR01

SWL - 250kg

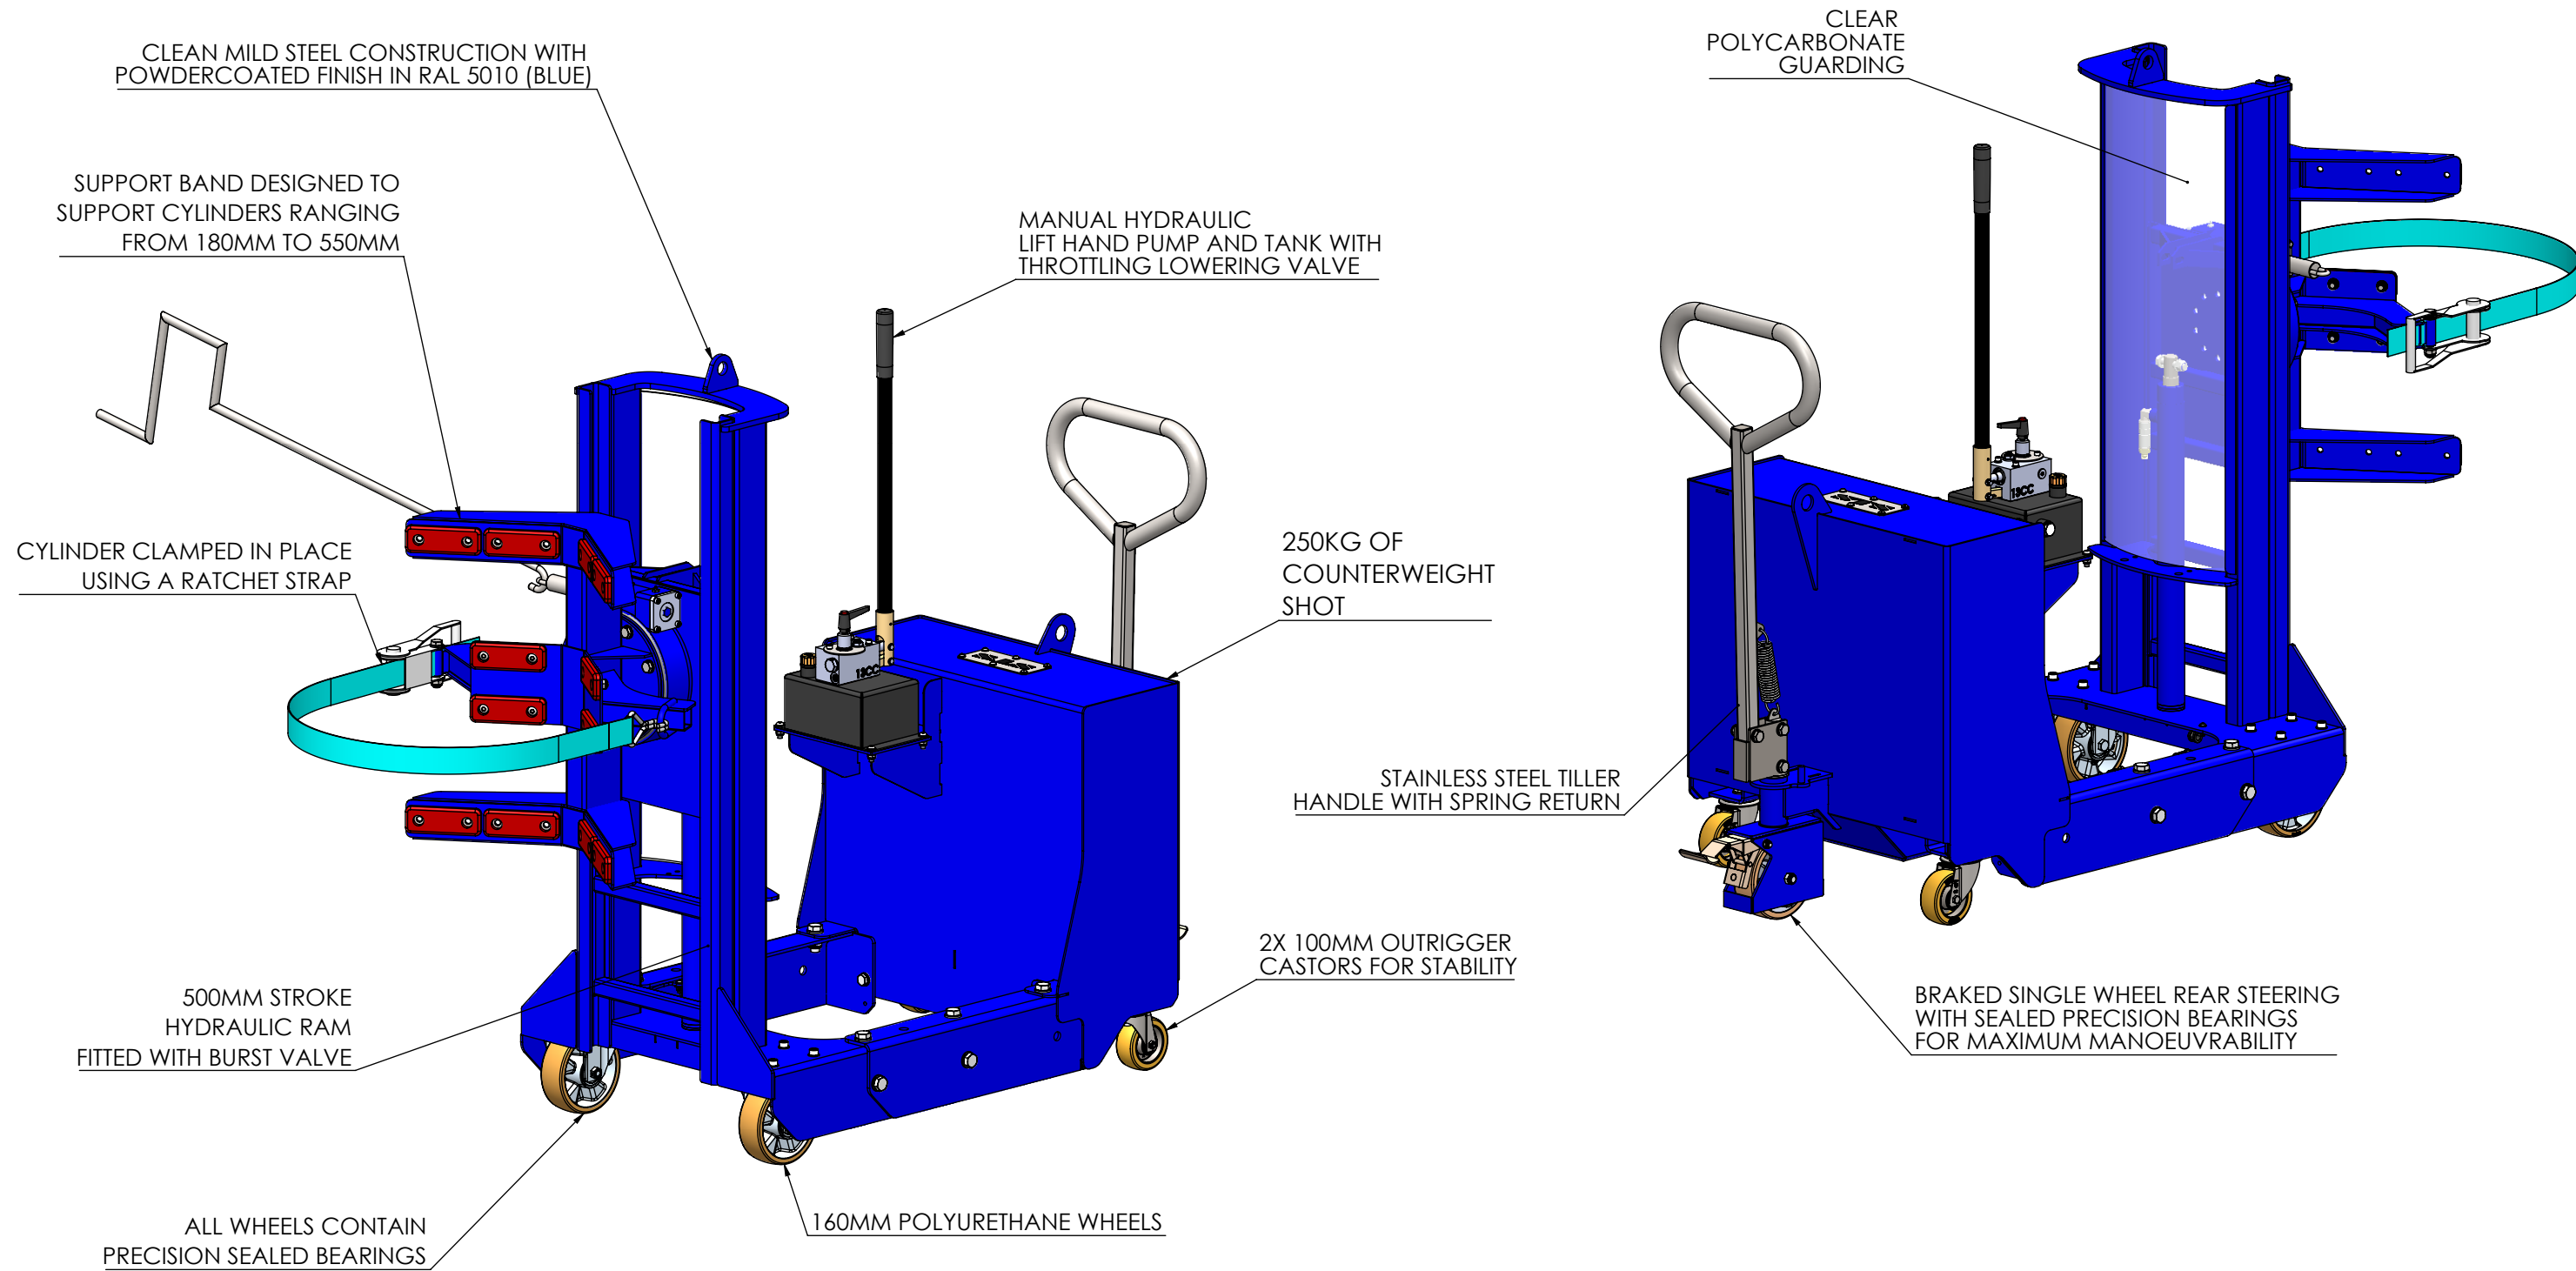

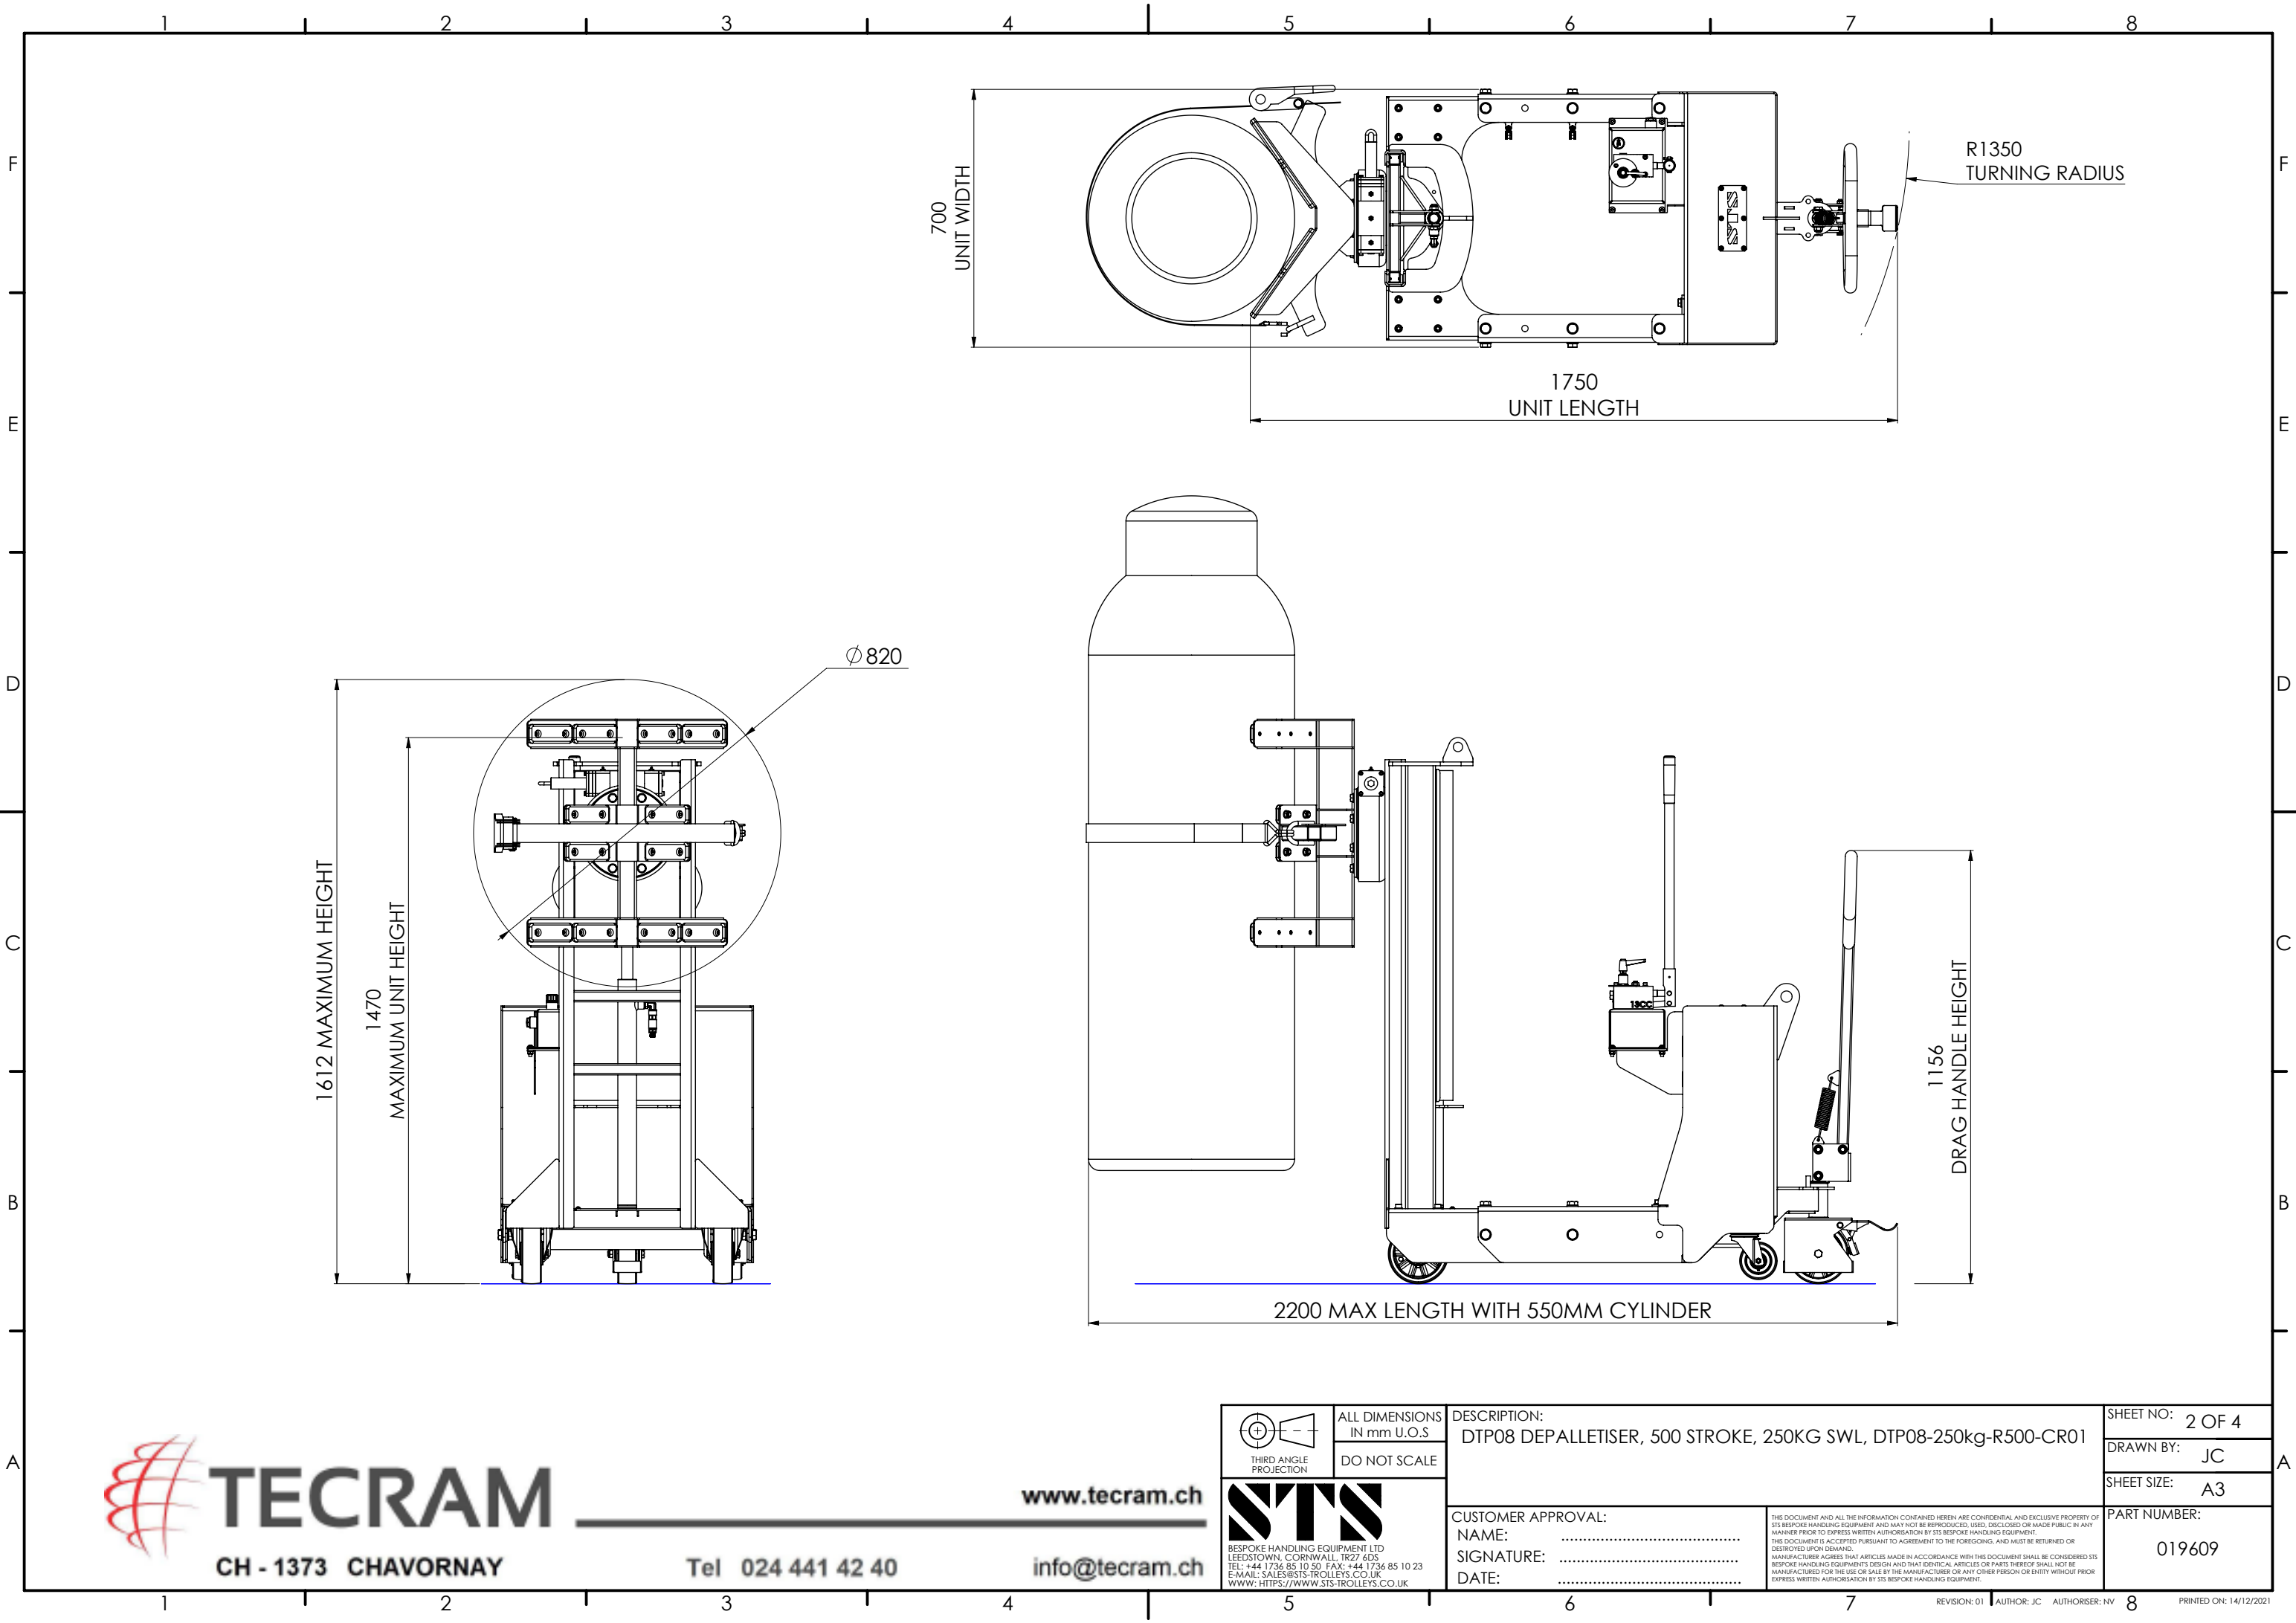

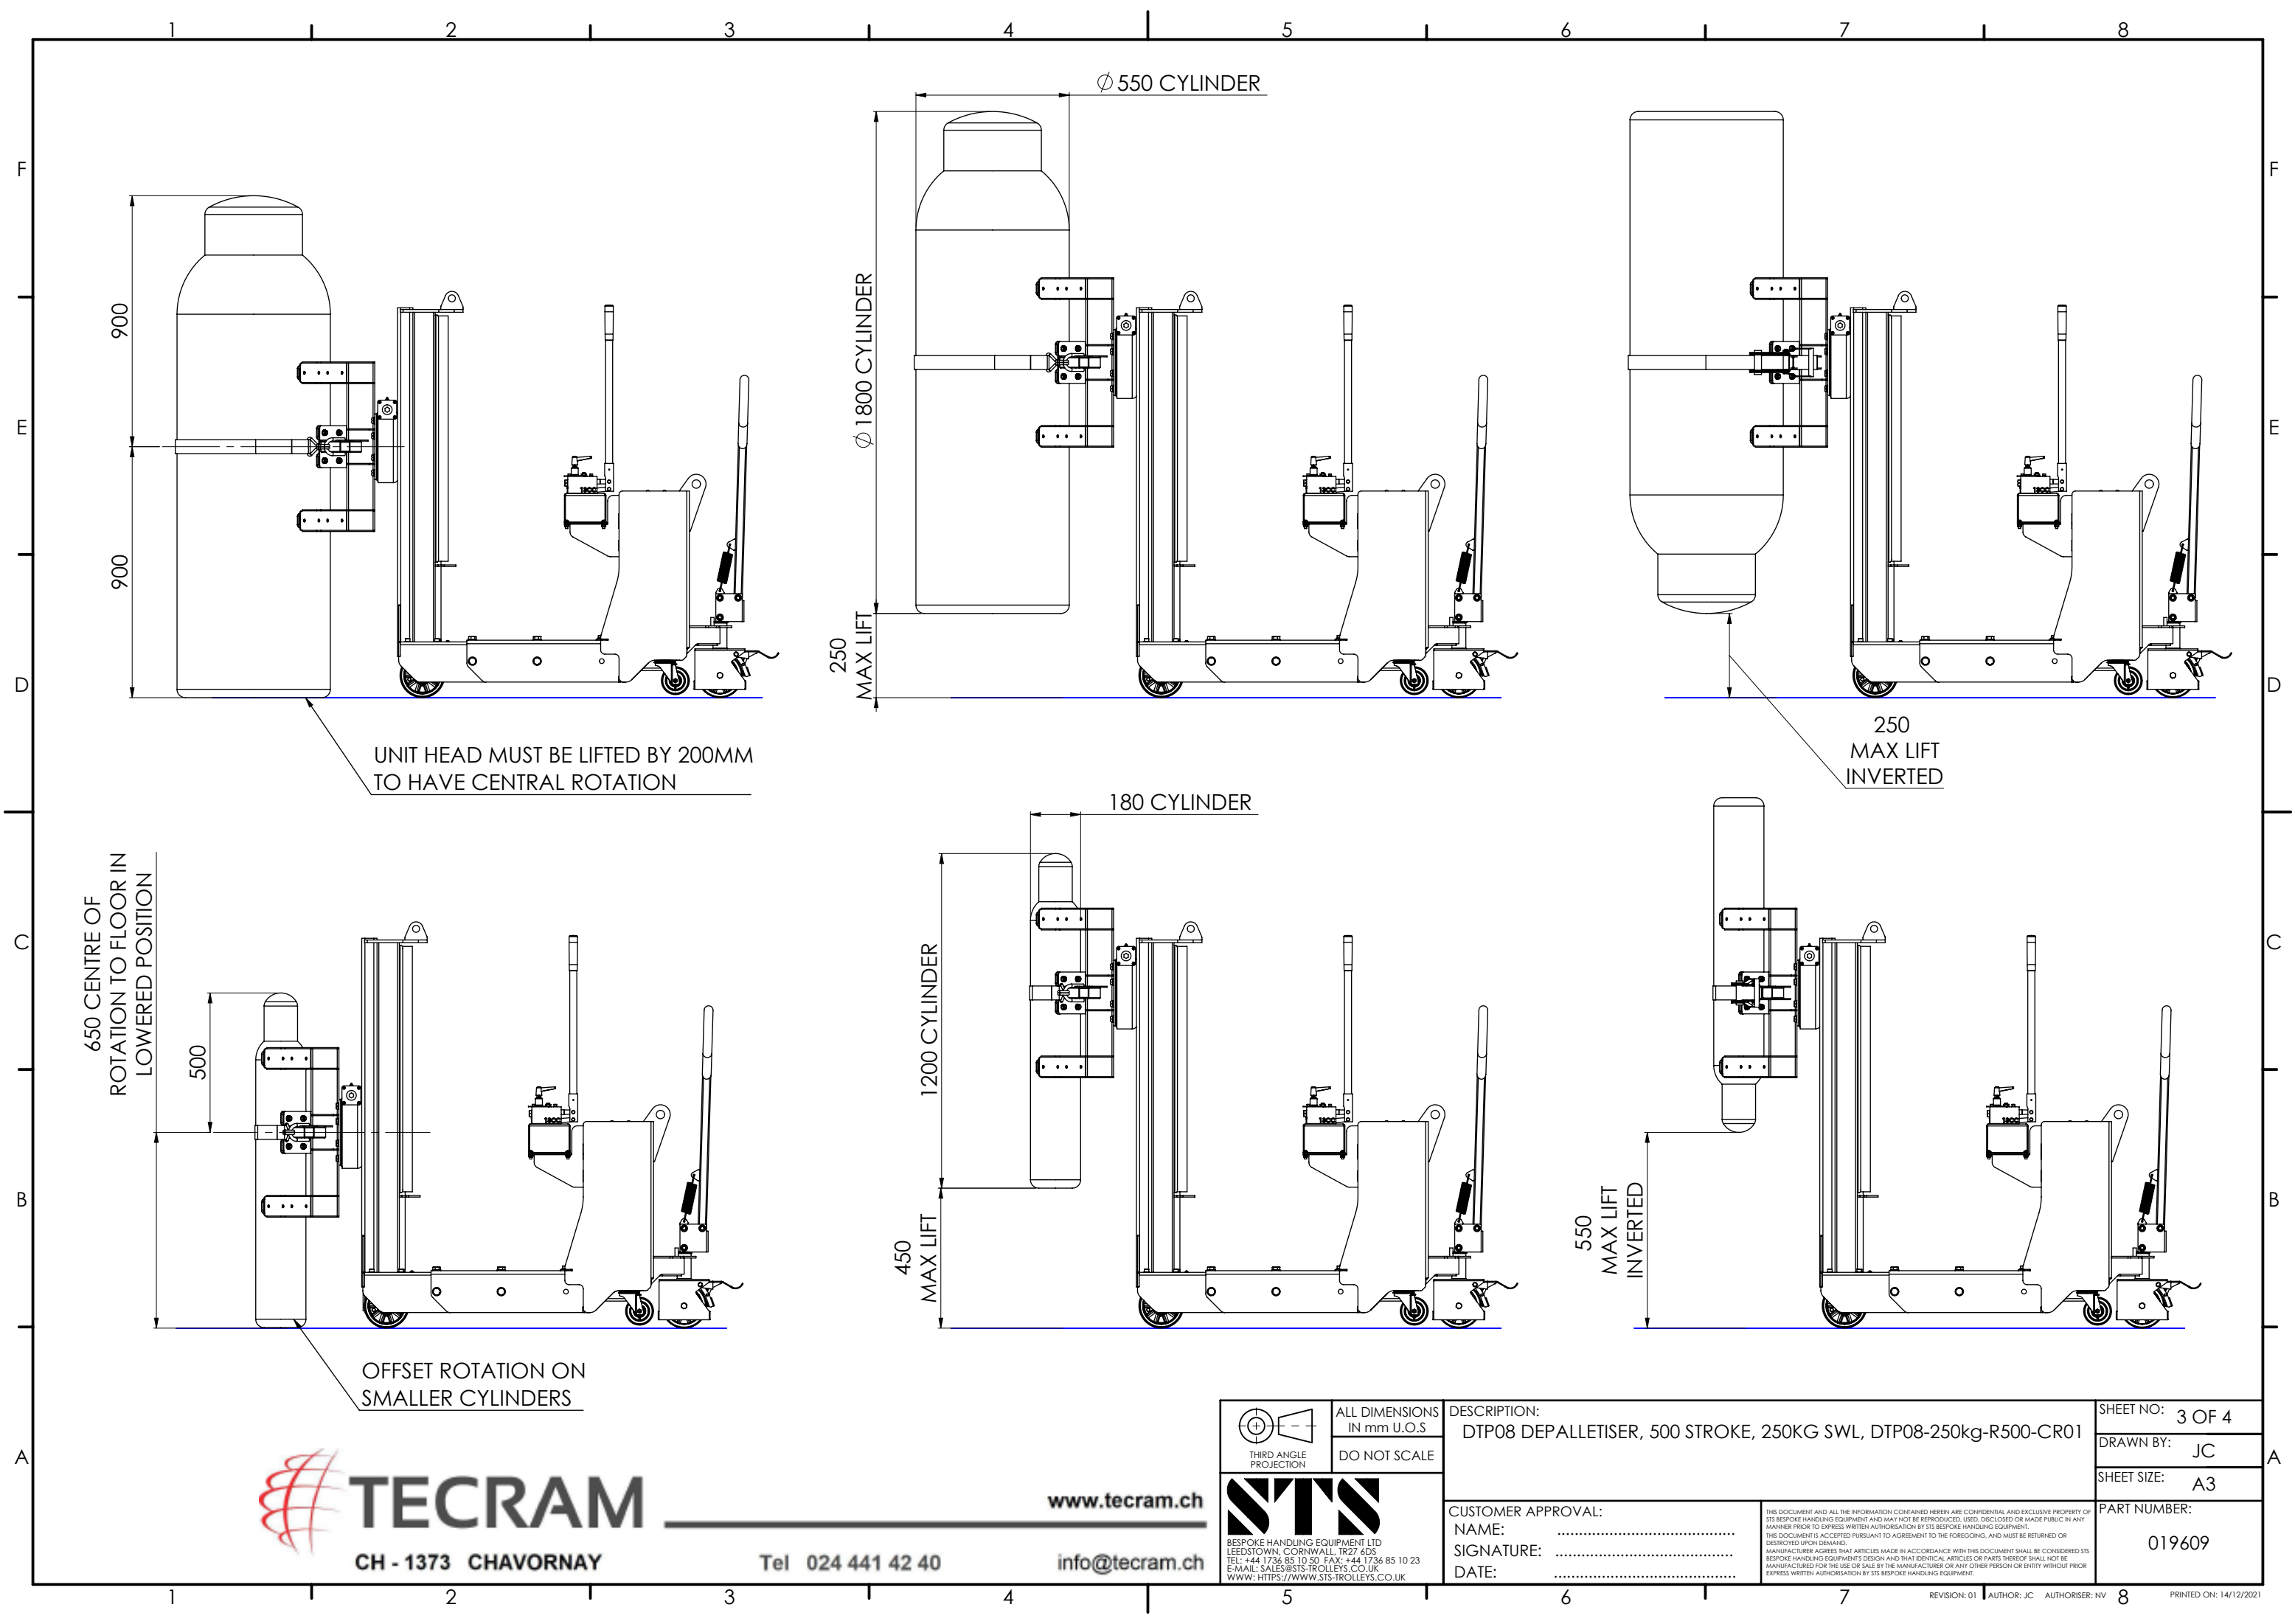

UNIT HEAD MUST BE LIFTED BY 200MM
TO HAVE CENTRAL ROTATION

650 CENTRE OF
ROTATION TO FLOOR IN
LOWERED POSITION

OFFSET ROTATION ON
SMALLER CYLINDERS



Tel 024 441 42 40

www.tecram.ch
info@tecram.ch

	ALL DIMENSIONS IN mm U.O.S	DESCRIPTION: DTP08 DEPALLETISER, 500 STROKE, 250KG SWL, DTP08-250kg-R500-CR01	SHEET NO: 3 OF 4
	DO NOT SCALE		DRAWN BY: JC
 BESPOKE HANDLING EQUIPMENT LTD LEEDSTOWN, CORNWALL, TR27 6DS TEL: +44 1736 85 10 50 FAX: +44 1736 85 10 23 E-MAIL: SALES@STS-TROLLEYS.CO.UK WWW: HTTPS://WWW.STS-TROLLEYS.CO.UK		CUSTOMER APPROVAL: NAME: SIGNATURE: DATE:	SHEET SIZE: A3
			PART NUMBER: 019609
REVISION: 01		AUTHOR: JC AUTHORISER: NV	
		PRINTED ON: 14/12/2021	